




CHECK VALVE

PC01.S08

Pilot check valve, Ball type

TECHNICAL DATA

Max. flow	25L/min
Max. working pressure	350bar
Temperature range	-30°C to +80°C (Buna N)
Recommended oil cleanliness	ISO 17/15/13
Cavity	SAE08-2
Installation torque	27.1Nm

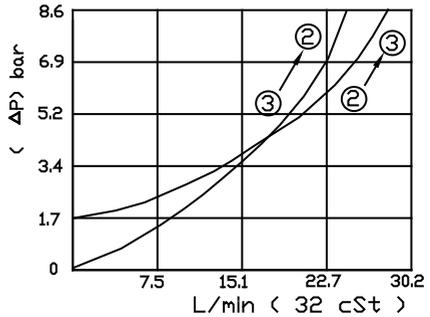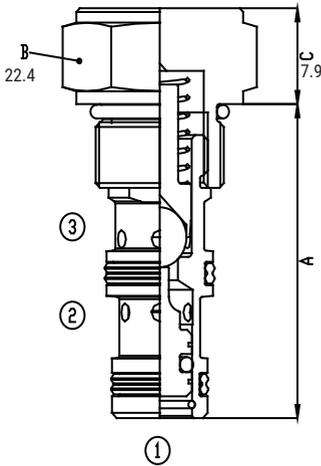

ORDERING CODE

PC01	S08	0	1	0	0B
Cavity S08 = SAE08-2		Conductance Ratio 0 = 3:1	Opening Pressure 1 = 1.72 bar 2 = 4.8 bar 3 = 6.2 bar 4 = 8.2 bar 5 = 18.3 bar	Seals 0 = Standard type (Buna N) V = fluorine rubber	