

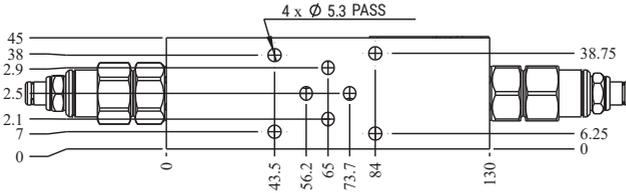


**TECHNICAL DATA**

Nominal flow	60L/min
Max. working pressure	350bar
Setting pressure	See table 1
Pilot ratio	See table 1
Body Material	Steel
Install standard	ISO 4401-03-02-0-94

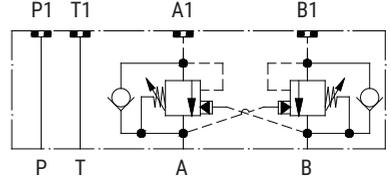

**Note:**  
Pressure setting must be 30% higher than pressure induced by the load.

**TABLE 1**

	D0D	H0H	I0I
Set. range (bar)	70-280	140-350	140-420
Set. pressure (bar)	260	350	350
Pilot ratio	3:1	4.5:1	5:1

**ORDERING CODE**



See table 11

Ports  
NS 6