
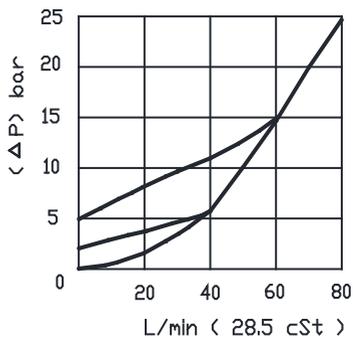
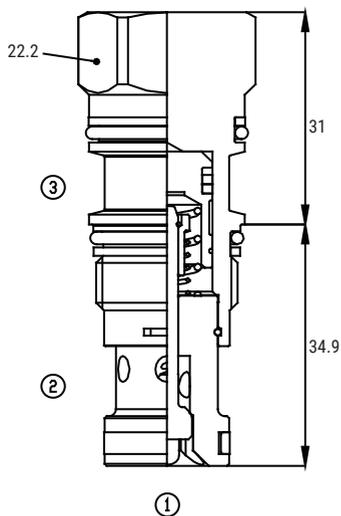


PC03.11A

Pilot check valve, Poppet type

TECHNICAL DATA

Max. flow	60L/min
Max. working pressure	350bar
Temperature range	-30 °C to +80 °C (Buna N)
Recommended oil cleanliness	ISO 17/15/13
Cavity	T-11A
Installation torque	40-50Nm



ORDERING CODE

PC03	11A	0	1	0	0B
Cavity 11A = T-11A	Conductance Ratio 0 = 3:1 1 = Manual voltage conduction	Opening Pressure 1 = 0.3 bar 2 = 1.0 bar 3 = 2.0 bar 4 = 3.5 bar 5 = 5.0 bar 6 = 7.0 bar	Seals 0 = Standard type (Buna N) V = fluorine rubber		