



SHUTTLE VALVE

LS02.M18


Ball type

TECHNICAL DATA

Max. flow	10L/min
Max. working pressure	350bar
Version	Ball type-Direct acting
Cavity	CL-M18
Installation torque	35-40Nm
Weight	0,062kg

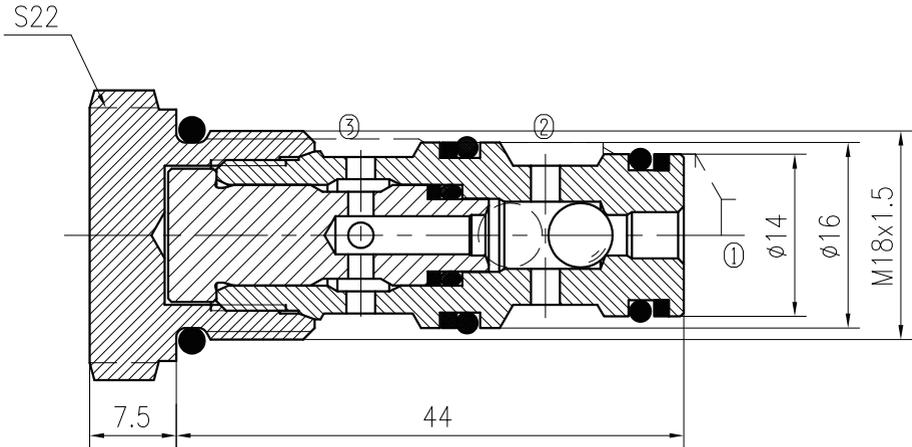

p/Q performance

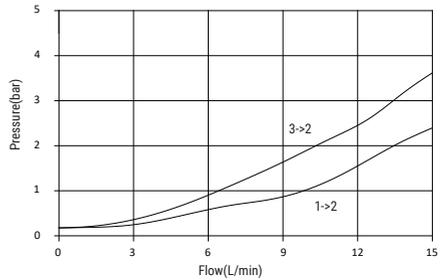

ORDERING CODE



Cavity
M18 = CL-M18

Seals
0= Standard type (Buna N)
V= fluorine rubber