



PD01

Hydraulically operated directional valve, Atmospherically referenced



TECHNICAL DATA

Technische Parameter

Max. working pressure 250bar
 Temperature range -30 C to +80 C (Buna N)
 Recommended oil cleanliness ISO 17/15/13

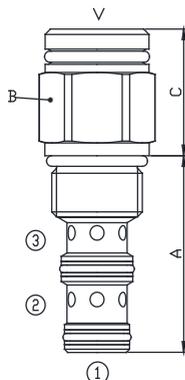

Max.flow	Model	Cavity	A	B	C	Installation torque
38 L/min	PD01.S10	SAE10-2	46.0	25.4	29.7	33-37Nm
114 L/min	PD01.S12	SAE12-2	70.6	31.8	39.1	47-52Nm



ORDERING CODE

