
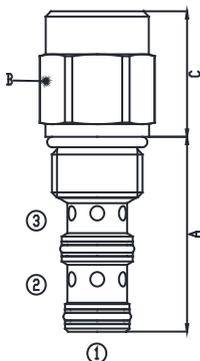


PD02



Hydraulically operated directional valve, Internal drain to port 3

TECHNICAL DATA

Max. working pressure 240bar
 Temperature range -30 C to +80 C (Buna N)
 Recommended oil cleanliness ISO 17/15/13



Max.flow	Model	Cavity	A	B	C	Installation torque
38 L/min	PD02.S10	SAE10-2	46.7	25.4	29.8	33.9Nm
114 L/min	PD02.S12	SAE12-2	70.6	31.8	39.1	47.4Nm



ORDERING CODE

