
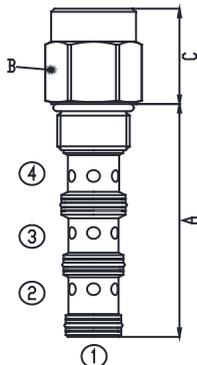


PD03




Hydraulically operated directional valve, External drain to port 4

TECHNICAL DATA

Max. working pressure 250bar
 Temperature range -30 C to +80 C (Buna N)
 Recommended oil cleanliness ISO 17/15/13



Max.flow	Model	Cavity	A	B	C	Installation torque
38 L/min	PD03.S10	SAE10-3	62.0	25.4	29.7	33-37Nm
114 l/min	PD03.S12	SAE12-3	98.6	31.8	39.1	47-52Nm
170 L/min	PD03.S16	SAE16-3	105	38.1	33.3	67-74Nm

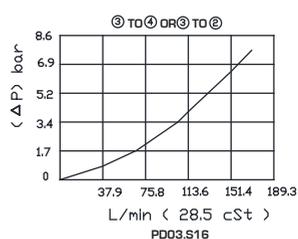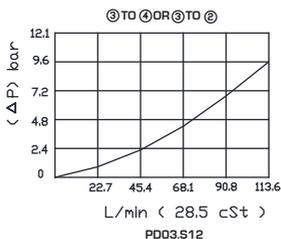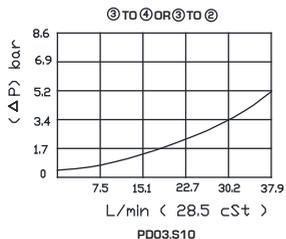

ORDERING CODE

PD03	S10	1	1	0	0B
	<p>Cavity</p> <p>S10 = SAE10-3 S12 = SAE12-3 S16 = SAE16-3</p>	<p>Symbol</p> <p>1 = NO normal open 2 = NO normal closed</p>	<p>Opening Pressure</p> <p>1 = 7.6 bar 2 = 11.7 bar</p>	<p>Seals</p> <p>0 = Standard type (Buna N) V = fluorine rubber</p>	