
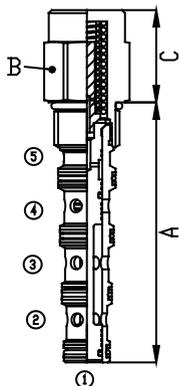


PE03



Hydraulically operated directional valve, External drain to port 5

TECHNICAL DATA

Max. working pressure 250bar
 Temperature range -30 C to +80 C (Buna N)
 Recommended oil cleanliness ISO 17/15/13



Max.flow	Model	Cavity	A	B	C	Installation torque
38 L/min	PE03.S10	SAE10-4	77.7	25.4	29.7	33.9Nm
95 L/min	PE03.S12	CL-016	110.2	31.8	39.1	47.4Nm



ORDERING CODE



Cavity
 S10 = SAE10-4
 S12 = CL-016(1-1/16 - 12 UN)

Opening Pressure
 1 = 7.7 bar

Seals
 0= Standard type (Buna N)
 V= fluorine rubber