

DIRECTION VALVE



# PF01

Hydraulically operated directional valve, External drain to port 6



## TECHNICAL DATA

Technische Parameter


Max. working pressure 250bar  
 Temperature range -30 C to +80 C (Buna N)  
 Recommended oil cleanliness ISO 17/15/13

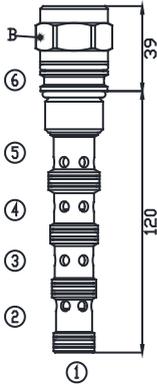


Max.flow	Model	Cavity	A	B	C	Installation torque
56 L/min	PF01.S12	CL-007	119.9	31.8	39.1	47-52Nm
95 L/min	PF01.S16	CL-011	131.8	38.1	51.6	67-74Nm



## ORDERING CODE



**Cavity**  
 S12 = CL-007 (1-1/16 - 12 UN)  
 S16 = CL-011 (1-5/16 - 12 UN)



**Opening Pressure**  
 1 = 7.7 bar  
 2 = 11.7 bar

**Seals**  
 0 = Standard type (Buna N)  
 V = fluorine rubber