
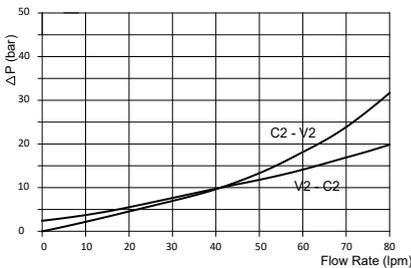
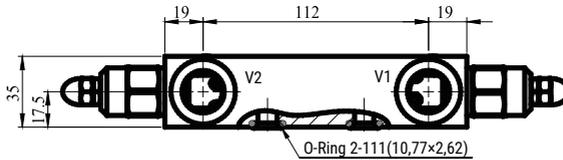
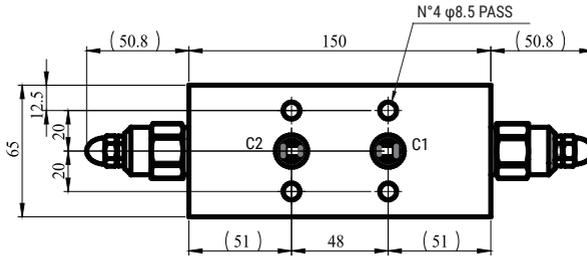


# CBFD.H00.51.A04

FLANGED MOUNTING 40x48

## TECHNICAL DATA

|                       |            |
|-----------------------|------------|
| Nominal flow          | 80L/min    |
| Spring range          | 200~350bar |
| Max. working pressure | 450bar     |
| Setting pressure      | 420bar     |
| Pilot ratio           | 5.3:1      |
| Body Material         | Steel      |



|       |  | Ports  |
|-------|--|--------|
| C1/C2 |  | φ9     |
| V1/V2 |  | G 1/2" |

**Note:**

Pressure setting must be 30% higher than pressure induced by the load.

## ORDERING CODE

|             |            |                          |          |          |                      |
|-------------|------------|--------------------------|----------|----------|----------------------|
| <b>CBFD</b> | <b>H00</b> | <b>5</b>                 | <b>1</b> | <b>A</b> | <b>04</b>            |
|             |            | Pilot ratio<br>5 - 5.3:1 |          |          | Ports<br>04 - G 1/2" |