
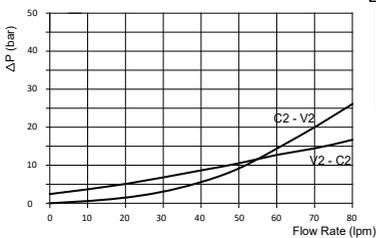







KF01-40-H

- Motion control, dual setting, with brake release port
- Start with high pressure, brake with low pressure
- With safety relief valve

TECHNICAL DATA

Nominal flow	60L/min
Max. working pressure	350bar
Overcenter valve Setting pressure	130bar
Buffer relief valve Setting pressure	60bar~130bar (Setting 100bar)
Safety relief valve Setting pressure	140bar
Pilot ratio	4.25:1
Body Material	Steel



Ports	
V1/V2/C1/C2	G 1/2"
BR	G 1/4"

Note:
 Pressure setting must be 30% higher than pressure induced by the load.

ORDERING CODE



H-with safety relief valve