
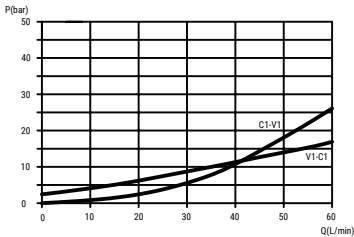
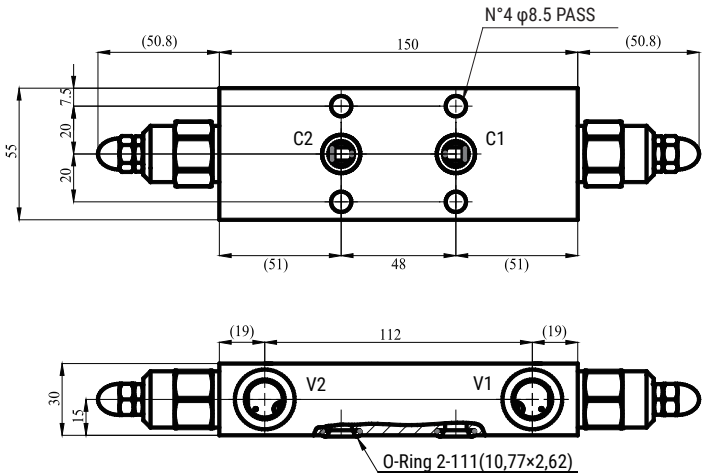


KF02B1-40

With adjustable pilot ratio

TECHNICAL DATA

Nominal flow	60L/min
Max. working pressure	350bar
Setting pressure range	160-370bar
Pilot ratio	4.25:1
Body Material	Steel



Note:
Pressure setting must be 30% higher than pressure induced by the load.

TABLE 1

DV1	DV2
6: $\varnothing 0.6$	6: $\varnothing 0.6$
7: $\varnothing 0.7$	7: $\varnothing 0.7$
8: $\varnothing 0.8$	8: $\varnothing 0.8$
9: $\varnothing 0.9$	9: $\varnothing 0.9$
0: no orifice	0: no orifice

TABLE 2

V1 limit	V2 limit
N: 60L/min	N: 60L/min
A: 40L/min	A: 40L/min
B: 25L/min	B: 25L/min
C: 16L/min	C: 16L/min

ORDERING CODE

K F 02	B 1	- 40 -	N	89	NN
			PIN P-with N-without	Orifice configuration See table 1	Limit of flow See table 2

Ports	
C1/C2	$\varnothing 9$
V1/V2	G 3/8"